



ISO 9001:2008 and ISO 14001:2004 Certified Company

Manufacturer's Specification


PortaFloor MAX™*

Product Description

PortaFloor MAX is a heavy-duty, easy to install, modular flooring system that is designed for outdoor weatherability, is environmentally friendly, and promotes water drainage. PortaFloor MAX provides a stable, high performance flooring surface anywhere.

Technical Information

Dimensions:	18" x 18" x 2" square puzzle piece design
Weight:	6.8 lbs.
Material:	Polypropylene recycled material
Color:	Black (Optional colors available upon request)
UV Stability:	Good
Connection System:	Corner locks click into connect 4 panels Edge locks click into connect perimeter pane Locks made of high-strength nylon

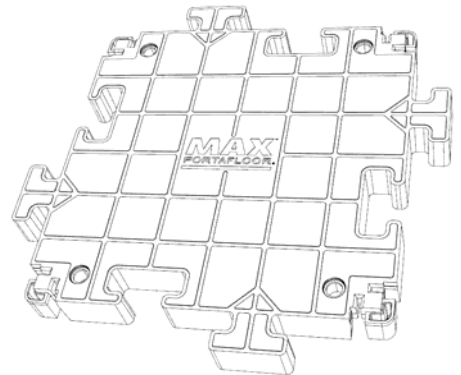


PortaFloor MAX Panel

Performance Test Results

Load Capacity:	80,276 pounds per square foot @ 72° F 61,183 pounds per square foot @ 150° F
Point Load Capacity:	557 pounds per square inch @ 72° F 424 pounds per square inch @ 150° F
Critical Radiant Flux: (ASTM E648-10)	<0.15 W/cm ²
Flame Spread: (CAN/ULC S102.2-07)	Flame Spread – 50 Smoke Developed – 550
Chemical Resistance: (ASTM D543-06)	Pass
R-Value:	1.44 hr·ft ² ·°F/BTU
Cold Weather Anchoring:	-51°C Through penetration with no shattering
Optional Accessories:	Accessory Panels (See Page 2) Lock Removal Tool Replacement Fork Set (4 Count)
Warranty:	5 year limited




Corner Lock




Edge Lock

* Patent Pending


Accessory Panels

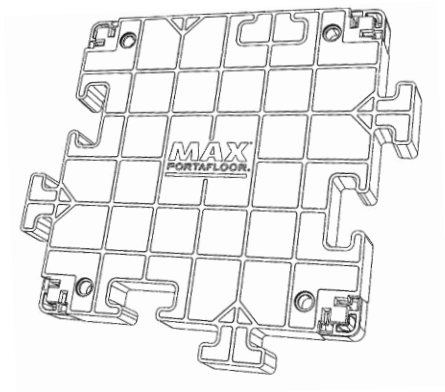


Straight Edge

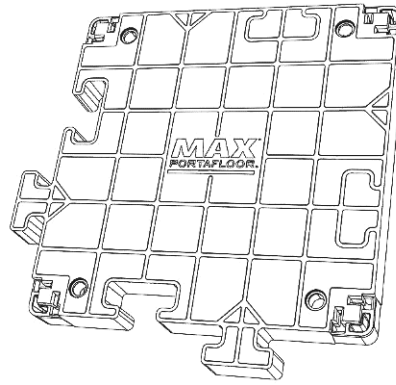


Straight Edge Corner

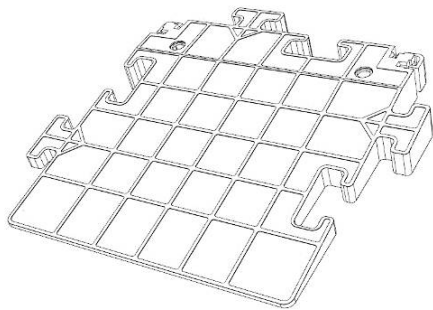

Ramp Edge

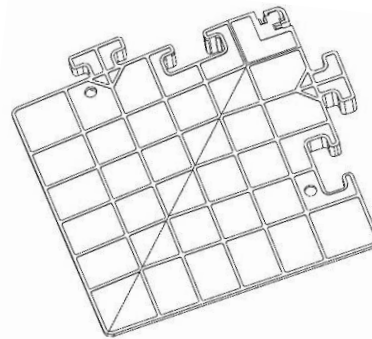

Ramp Edge Corner

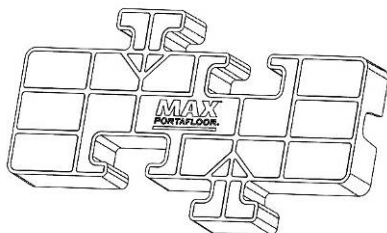

Conduit



Conduit Filler